32.768kHz SMD LOW PROFILE CRYSTAL

6.9 x 1.4 x 1.3 mm

ABS13

Moisture Sensitivity Level: Level 1

FEATURES:

- Low frequency
- Plastic package with embedded heat resistant crystal in cylinder package
- Extended temperature -40°C to +85°C for industrial applications
- Suitable to RoHS compliant reflow

RoHS/RoHS II compliant. Pb in high temperature solder (exempt 7(a) per RoHS II 2011/65/EU Annex)



▷ APPLICATIONS:


- Commercial & Industrial applications
- Wireless communications
- PDA and Palm Pilots

| \triangleright | STANDARD | SPECIFICATIONS: |
|------------------|----------|------------------------|
| | | |

| Parameters | Minimum | Typical | Maximum | Units | Notes |
|-----------------------------------|---------|---------|---------|--------------------|--|
| Nominal Frequency | | 32.768 | | kHz | |
| Operating Temperature | -40 | | +85 | °C | |
| Turnover Temperature | +20 | +25 | +30 | °C | |
| Storage Temperature | -55 | | +125 | °C | |
| Frequency Tolerance @+25°C | -20 | | +20 | ppm | See options |
| Frequency Coefficient (B) | -0.040 | -0.034 | -0.028 | ppm/T ² | |
| Equivalent series resistance (R1) | | | 65 | kΩ | |
| Load capacitance (CL) | | 12.5 | | pF | See options |
| Drive Level | | | 1 | μW | |
| Aging | -3 | | +3 | ppm | @25°C±3°C First year |
| Insulation Resistance | 500 | | | MΩ | $ (a) 100 \text{Vdc} \pm 15 \text{V} $ |

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

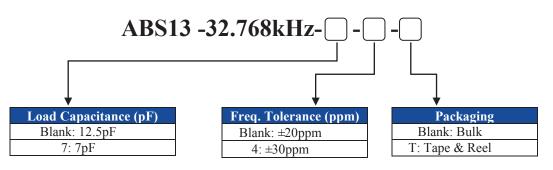





32.768kHz SMD LOW PROFILE CRYSTAL




RoHS/RoHS II compliant. Pb in high temperature solder (exempt 7(a) per RoHS II 2011/65/EU Annex)



OUTLINE DRAWING:

ABS13

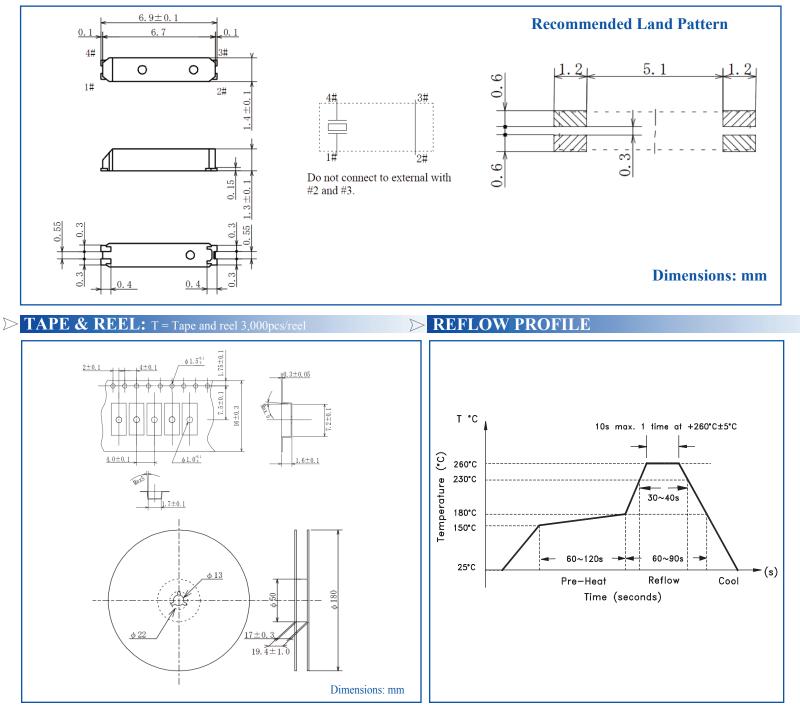

ATTENTION: Abracon Corporation's products are COTS - Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



ISO9001:2008

CERTIFIED

Visit www.abracon.com for Terms & Conditions of Sale Revised: 12.18.12 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com